
3-WIRE INDUCTIVE GEAR TOOTH SPEED SENSOR

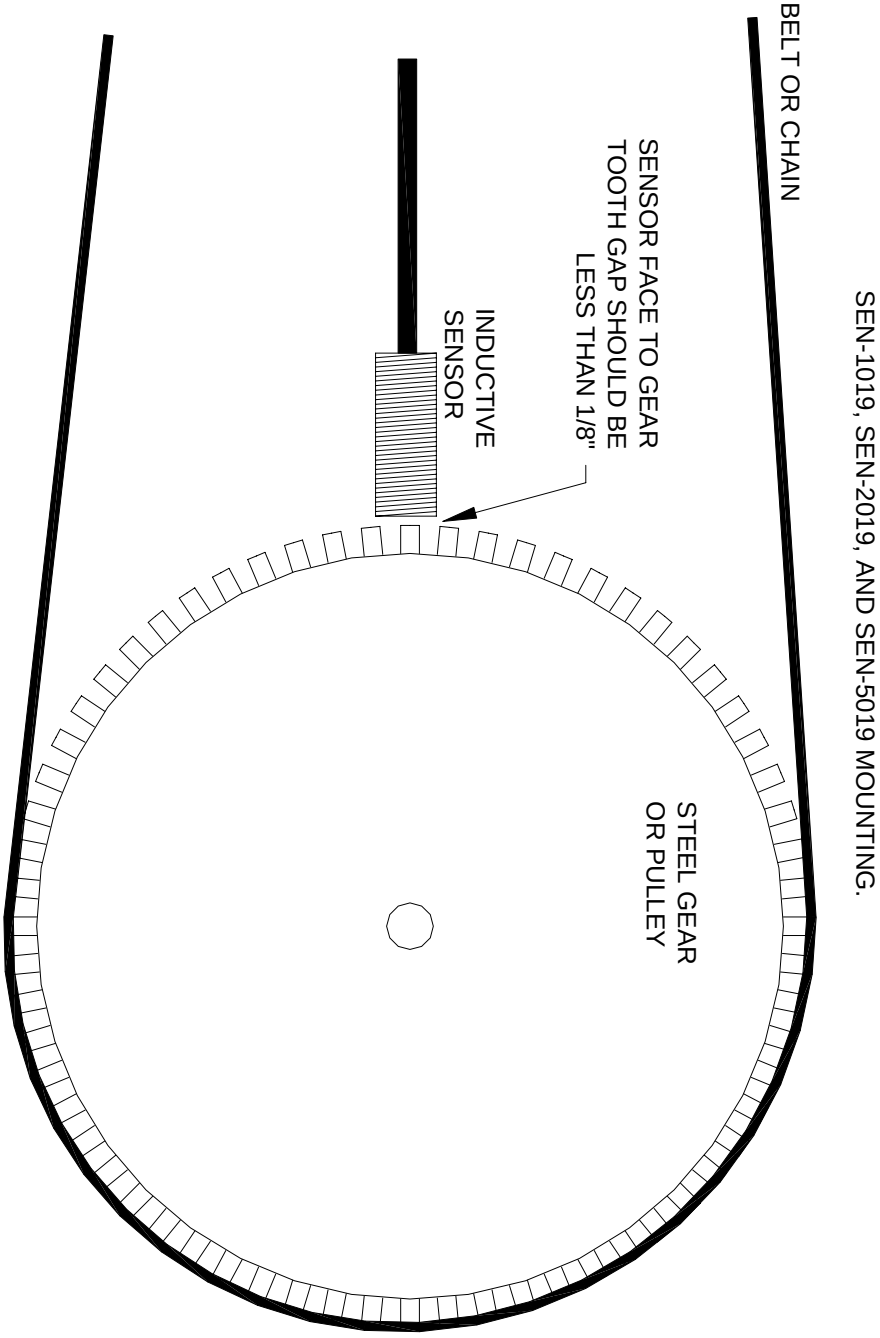

SEN-1019, SEN-2019, AND SEN-5019 MOUNTING.

A bracket will need to be fabricated to mount the inductive sensor securely. The body of the sensor is threaded to allow easy adjustment of the air gap.
The SEN-6019, SEN-2019 and SEN-5019 have mating connectors that plug directly into the gauge.
The SEN-1019 has three wires that are connected as follows:
BLUE - GROUND, BLACK -SPEED SIGNAL, TAN - SENSOR POWER (12V)

Dakota Digital
4510 W. 61ST St. N., Sioux Falls, SD 57107
Phone: (605) 332-6513 FAX: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com

MAN#650032

©Copyright 2004 Dakota Digital Inc.